


BRUKSANVISNING / USER MANUAL

KAJSA

KAJSA – Belysningsarmatur för montage dikt tak eller mot takdosa, i allmänna utrymmen som ex. hall och kök. Kapslingsklass IP20

KAJSA – Luminaire for installation towards ceiling or recessed junction box, for general applications e.g. halls and kitchen with IP20 demands.

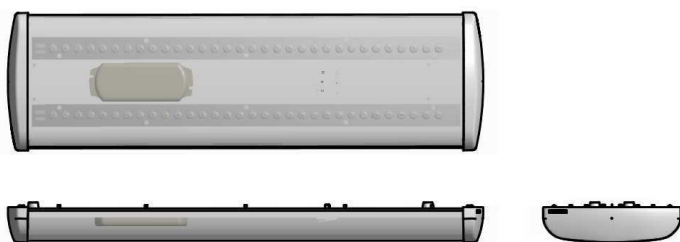

Article	Length (mm)	Width (mm)	Height (mm)	c/c (mm)	Weight (Kg)
Kajsa	603	160	46	500	1,0
Kajsa	1203	160	46	1000	2,0
Kajsa	1503	160	46	1000	2,5

Montage / Installation


Dikt tak i nyckelhål med c/c mått eller mot takdosa i spår

Towards ceiling in keyhole with c/c dimensions or towards junction box in slots

Inkoppling / Wiring

3-polig plint. Variant med -DIM kan regleras 10-100% med phasecut dimmer av typ leading edge / trailing edge.

3-pole terminal. Alternative with -DIM may be regulated 10-100% via a phasecut dimmer type leading edge / trailing edge.

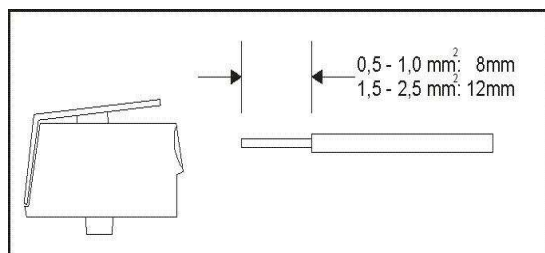

Service / Service

Bryt spänningen före arbete. Utbyte av komponenter får endast utföras av utsedd person.

Rengör med mjuk trasa.

Disconnect power supply before work. Components shall only be replaced by manufacturer or their designated person.

Clean luminaire with soft cloth.

