

L101 Blixtljus

High Powered Xenon Tube Beacon
5J Xenon Flash Tube
Three modes : Flashing 1 Hz*,
Flashing 1.5Hz[†] (DC units Only),
Double Strike[†] (DC Units Only)
IP Rating: IP66
Temp: -25°C to +55°C
Unit weight: 200g
CE

Order code	Voltage	Current
L101XDC012[z][x]/[y]	10-14 VDC/AC	500mA/380mA
L101XDC024[z][x]/[y]*	20-28 VDC/AC	250mA/300mA
L101XDC048[z][x]/[y]*	42-52 VDC	175mA
L101XAC048[z][x]/[y]	48 VAC±10%	250mA
L101XAC115[z][x]/[y]	115 VAC±10%	70mA
L101XAC230[z][x]/[y]	230 VAC±10%	35mA

[†]Flashing 1.5Hz and Double Strike modes are not available on the following units: L101XDC012[b][x]/[y] when used with an AC supply; L101XAC048[b][x]/[y]; L101XAC115[b][x]/[y] & L101XAC230[b][x]/[y].

* Denotes models with VdS/CPR Approval for EN54-23, 24/48 VDC application only.

Dimensions : 86.0 x 86.0mm
1.5mm² terminals
Cable entry: M20 cable entry (IP66)
Dependant on Back Box selected

[z] = Back Box Type
B = L101 type M = Multi-purpose type
A = A100 type S = Sonora type



[y] = Lens colour
R = Red* A = Amber G = Green
B = Blue C = Clear*

[x] = Housing colour
G = Grey R = Red W = White



1

3



Standard L101
Backbox





Multi-purpose
Backbox



Sonora
Backbox



A100
Backbox



2

- OBS!** Installationen måste utföras av en elektriker i enlighet med senaste reglerna och bestämmelserna
- OBS!** Koppla från strömkällan före installation eller service för att förhindra elektriska stötar
- OBS!** På blixtljuset, låt minst 2 minuter passera för att farlig högspänning ska urladdas från enheten
- OBS!** Linsen på enheten kan bli varm, låt den svalna före borttagning


TOLEKA

www.toleka.se Tel: 08-574 103 50 E-mail: kontakt@toleka.se

4




Unit	Category C	Category W	Category O	Power
L101XDC024[z][x]/C	C-9-6.8 V=326.9m³	W-2.4-4.8 V=55.3m³	O-4.8-10 V=230.4m³	6W
L101XDC024[z][x]/R	C-3-2.6 V=15.9m³	N/A	O-1.9-3.6 V=13.0m³	6W
L101XDC048[z][x]/C	C-9-7 V=346.4m³	W-2.5-5 V=62.5m³	O-5-10 V=250.0m³	8.4W
L101XDC048[z][x]/R	C-3-3 V=21.2m³	N/A	O-2-4 V=16.0m³	8.4W

Täckningsområde enligt EN 54-23

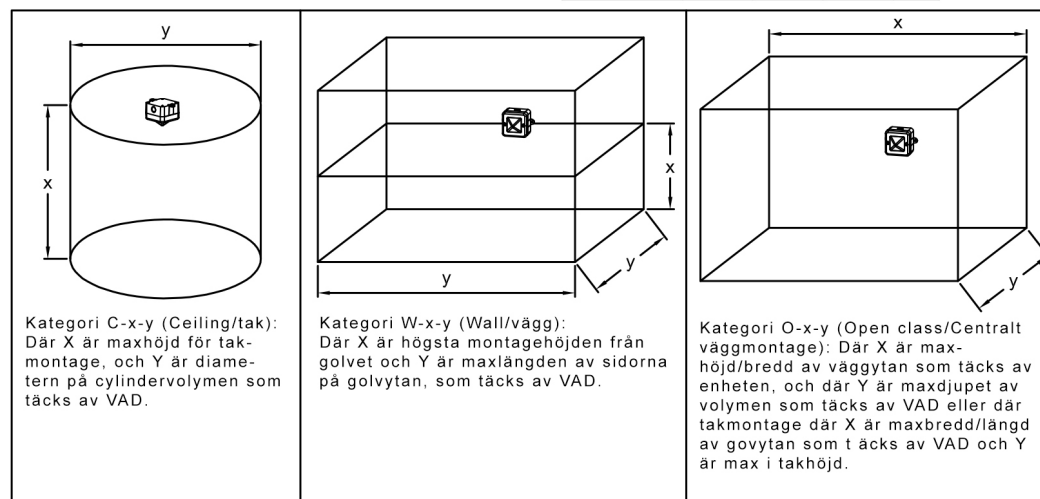


VAD = Visual Alarm

L101

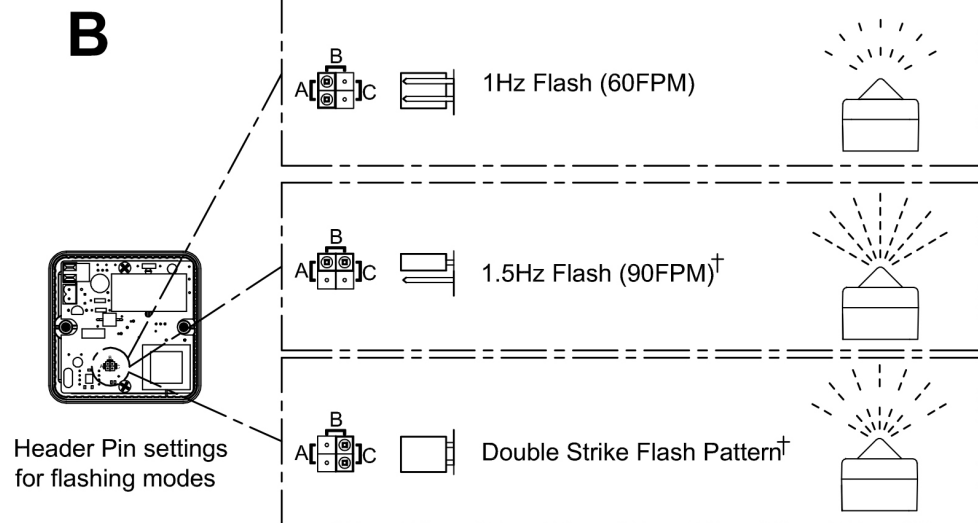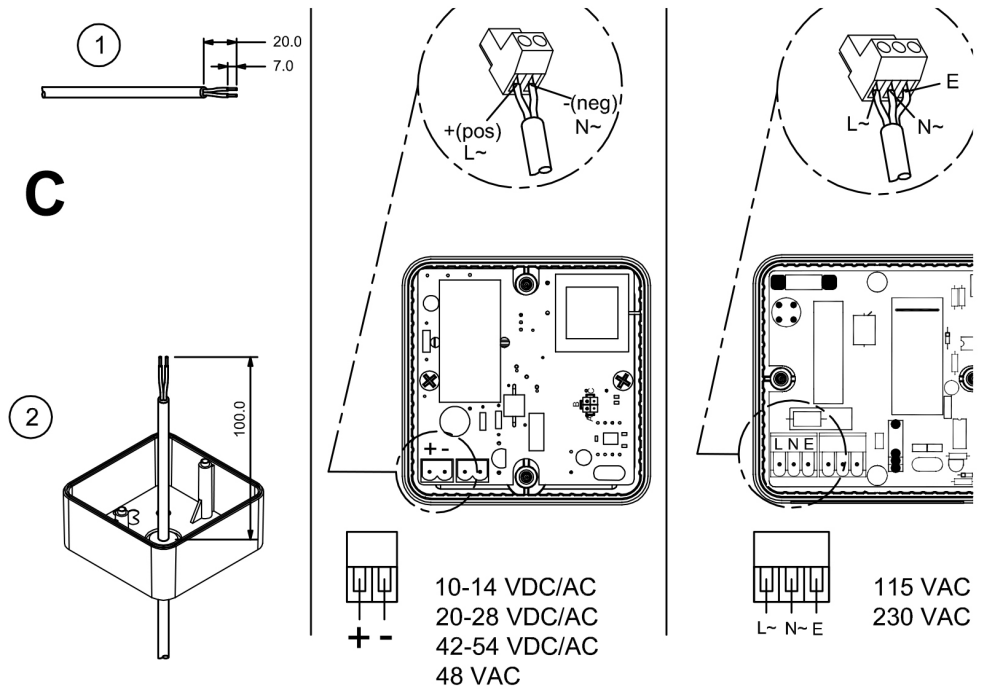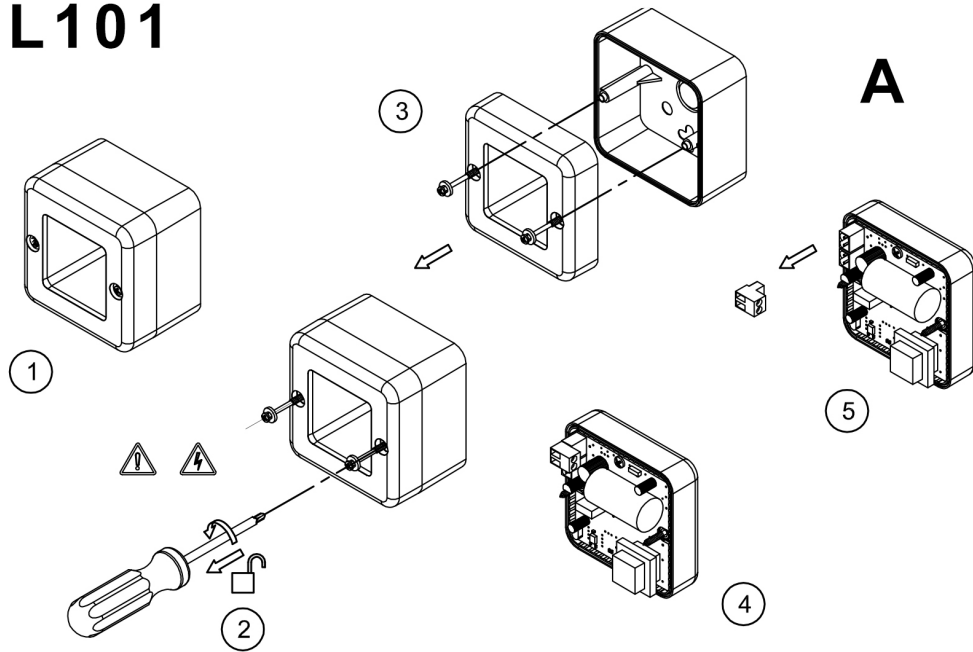

[†]Flashing 1.5Hz and Double Strike modes are not available on the following units: L101XDC012[b][x]/[y] when used with an AC supply; L101XAC048[b][x]/[y]; L101XAC115[b][x]/[y] & L101XAC230[b][x]/[y].

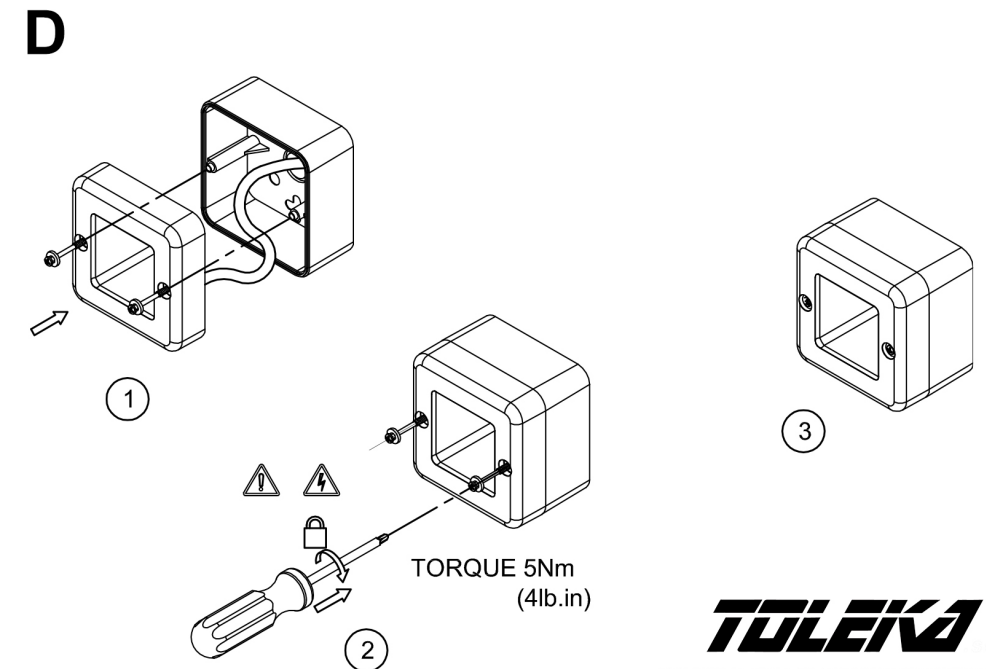

TOLEKA

www.toleka.se Tel: 08-574 103 50 E-mail: kontakt@toleka.se