



Mounting SAK 50 S184902-16

Torque for Hex SW 6mm M8x20
with
Washer 8,5x15x2, 25Nm

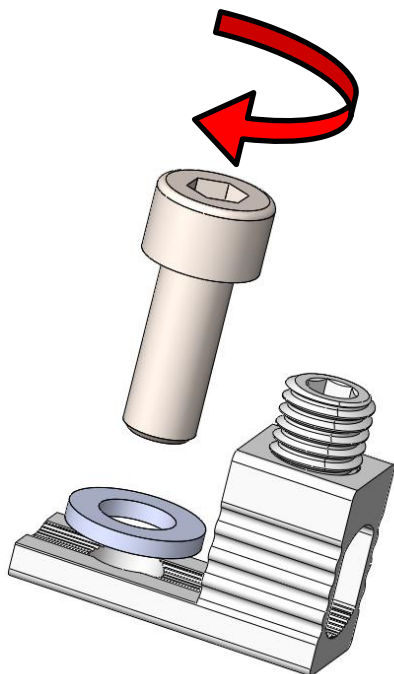


OT-Connectors are suitable for Aluminium- and copper conductors.

- Strip cable, see stripping length L_1 (table below)
- Remove any layer of oxide.
- Segmental conductor have to be rounded before mounting.

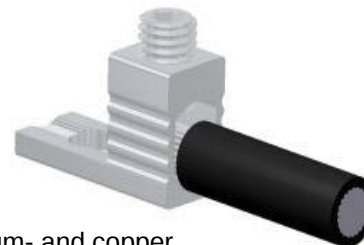

- Tighten the screw with torque M
- Support connector during tightening.

Connection			
Screw head for tool	SW	5 mm	Conductors
Tightening torque M	1,5-10 mm ²	3,5 Nm	1xAl/Cu 1,5-50 mm ²
	16-50 mm ²	10 Nm	Stripping length
	-	-	L_1 14±1 mm
	-	-	

Wiring, pcs / connection, Cu(Al)							
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²
3(1)	3(1)	3(1)	3(1)	3(1)	2(1)	1(1)	1(1)
70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
-	-	-	-	-	-	-	-