




tryggare
närvarande
nyskapande



JACK HOUSING





INSERT MODULE

IDC MODULE

WIRE LABEL 1

WIRE CAP

WIRE LABEL 2

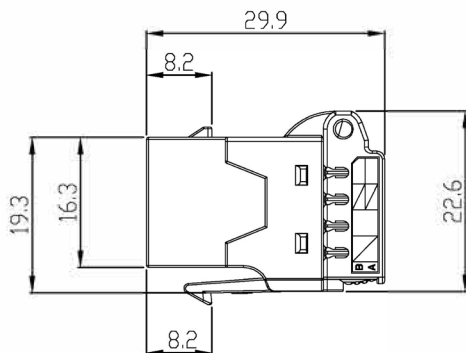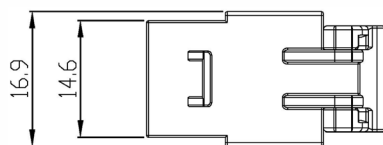

COMPONENTS

ITEM	PART NAME	Q'TY
1	JACK HOUSING	1
2	INSERT MODULE	1
3	IDC MODULE	1
4	WIRE CAP	1
5	WIRE LABEL 1/2	1/1

Transmission Performance:

Meet all requirements specified in connecting hardware requirements of:

ISO/IEC 11801, Category 6

IEC 60603-7-4

ANSI/TIA-568-C.2, Category 6

ELECTRICAL

Electrical Insulation Resistance : 500 MΩ min. @ 100V d.c.

Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute,

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum

IDC Wire Gauge : 22 ~ 24 AWG , (Solid Wire)

IDC Wire Gauge : 22 ~ 26 AWG , (Stranded Wire, Cable AWG Can not mixed use.)

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0

Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold

Color of housing: white (RAL#9016)

YY : year.

WW : week.

D : weekday, 1, Monday.

UNLESS OTHERWISE SPECIFIED:
TOLERANCES

INCH	MM	ANGULAR
.X ± .016	.X ± 0.2	.X ± 1°
.XX ± .008	.XX ± 0.1	.X ± .5°
.XXX ± .004		

MATERIAL

SURFACE

FINISH

PROJECT ID

R2101F-TMH-***

FILE

Z4606.DWG

DRAWN

EDDIE

CHECK

APPROVED

DATE

08/05'16



tryggare
närvarande
nyskapande

TITLE

E51 402 54

SIZE

A4

DRAWING NUMBER

Z4606

PART NUMBER

REV

2

SCALE 1/1

UNIT mm

SHEET 1 OF 1