MASSO 8010

Micro retraction distributor
(Levelling support available optionally)





Technical data

Dimensions (l×w×h):	170×170×255 mm
Mounting depth:	
– with levelling support:	255 mm
– with threaded pin extension:	255*–355 mm
Material:	Aluminium, colourless anodised salt- and seawater-proof
IP protection class:	
– in closed mode:	IP67, suitable for cleaning with wet sweepers, suitable for drive-over
– plugged in mode:	up to IP54, depending on equipment, suitable for stand-on
Cover:	screwable lid
Cover closure type:	lift grip
Cable outlet:	no
Loard capacity:	
– in closed mode:	4 t (40 kN)
Feed-in cable:	3×M32
Level-adjustable after installation:	no
Levelling support:	yes (optionally)

Remarks / Features

- micro retraction distributor for flush ground mounting
- 3×centre punch marks
- for additional holes ø25 mm and 2×centre punch marks for additional holes ø32 mm in bottom part of housing

Assortiment

MASSO 8010 Floor socket outlet ausfahrbar, closed IP67, **anodised aluminium,** 170×170×255 mm, incl. key, cannot be closed when plugged in

	Item no.	Description	Equipment
	840899	**MASSO 8010**	without equipment
✓	840934	**MASSO 8010**	1×CEE 16/5, 3×T23
	841022	**MASSO 8010**	1×T25, 3×T23
✓	840933	**MASSO 8010**	1×CEE 16/5 3×Schuko
	840935	**MASSO 8010**	1×CEE 16/5 2×Schuko, 2×RJ45
	840969	**MASSO 8010**	1×CEE 16/5, 3×British Standard 13 A


Other fitting options (e.g. compressed air) available on request!


Accessories / spare parts


✓	154104	**FONTO/MASSO Jackscrew levelling support:** 1×baseplate and 1×threaded pin M8×60
✓	840768	**FONTO / MASSO Threaded pin extension** M8×160 mm zinc-plated


Shorten threaded pin as required

FONTO / MASSO modules and accessories on page 20

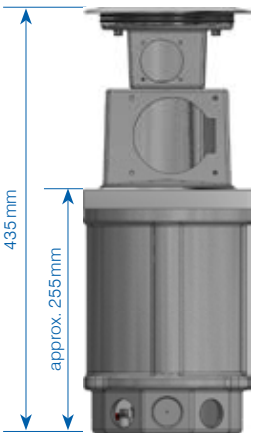



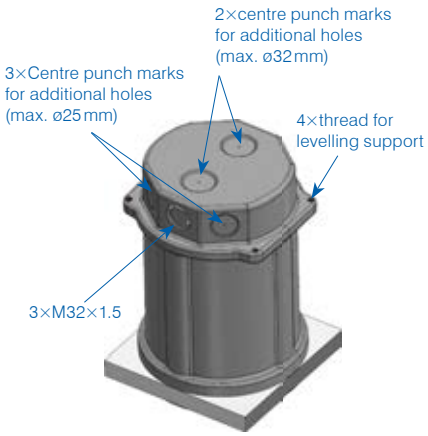



Levelling feet are only used for setting the floor socket outlet. load capacity / stability is only obtained by backfilling the floor socket outlet with stable material (mortar, concrete...).

✓ Available from stock and in our online shop! www.gifas.ch