


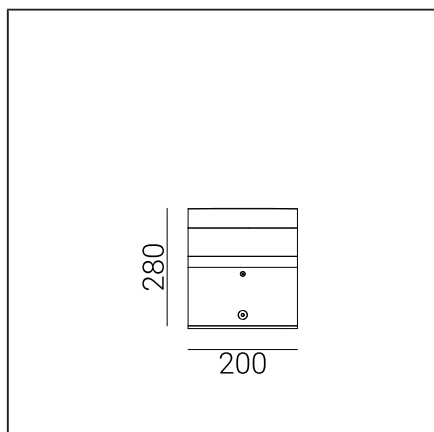

Allmän information

Typ armatur	Pollare
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Klart polykarbonat, UV stabiliserat
Typ ljuskälla	LED modul + driver
Ljusstyrning	Bakkantsdimmer
Nettovikt armaturen	4,84kg
Förpackning mått [cm]	22,5x22,5x37
LED	1305003G2 Cree XD16 4000K
Drivdon	Philips Xitanium 7W 0.35A 20V TE SC 230V 12NC
Led modul effekt	6,6W
Armatur effekt	8,4W
Lumen modul	854lm
Lumen ut	351lm
Led modul effekt	129,4lm/W
Armaturens effekt	41,8lm/W
ULOR	2,6%
Färgtemperatur	4000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	50 000h
LED-fotobiologiskt hot	RG0 or RG1
Effektfaktor	PF 0,98
Ta nominel:	+25°C
Inrush current	1A/15,2μs
Antal armaturer på automatsäkring	B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer

