


Art	E-nr	Färg	RAL
5014GR	7748103	GRAFIT	7016

Allmän information

Typ armatur	Pollare
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	PMMA, klart
Typ ljuskälla	LED modul + driver
Ljusstyrning	Ej dimbar
Netto / Bruttovikt armatur	11,63kg / 13,46kg
Förpackning mått [cm]	23x22x113
5xLED moduler	Cree JK3030 no.1805004 (Produktblad)
Drivdon	Philips Xitanium 20W/m 0.15-0,5A 54V
Led modul effekt	17,9W
Armatur effekt	22W
Lumen modul	2556lm
Lumen ut	1801lm
Led modul effekt	142,8lm/W
Armaturens effekt	81,9lm/W
Färgtemperatur	4000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	>50 000h
LED-fotobiologiskt hot	RG0 or RG1
Energieffektivitetsindex (EEI)	A++
Effektfaktor	PF>0,98
Ta nominel:	+25°C
Inrush current	18A/250µs

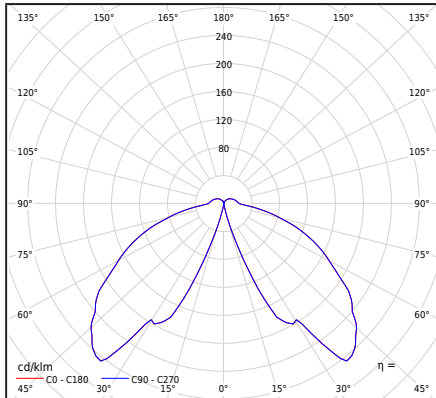

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer, BIM Revit, BIM ArchiCAD

