

Stainless Steel Hanger




The Stainless Steel Hangers are used to suspend a variety of HVAC, mechanical and electrical services in the food industry and high humidity environments.

FEATURES / BENEFITS

- Stainless steel housing and springs are corrosion resistant and durable in humid and saturated environments
- Ceramic rollers provide extra strength and corrosion resistance
- Aesthetically discreet and lightweight
- Available in two sizes with load ratings of 45 kg (No.2) and 90 kg (No.3)
- Supplied as a ready to use kit




INSTALLATION & ADJUSTMENT

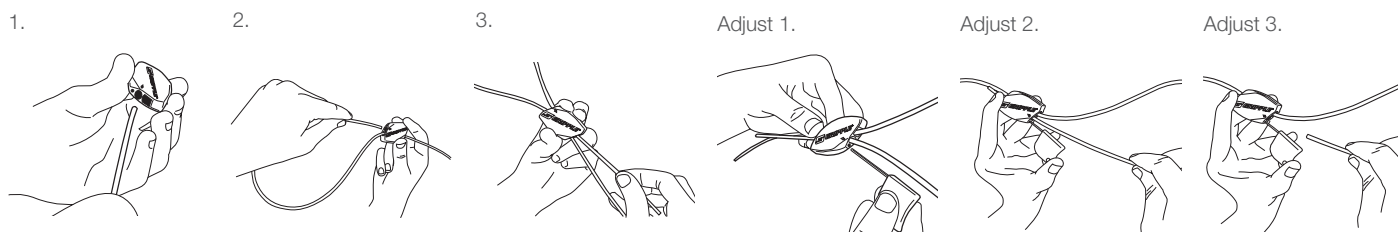

Ensure a minimum 75 mm of tail wire exit the hanger.

SPECIFICATION

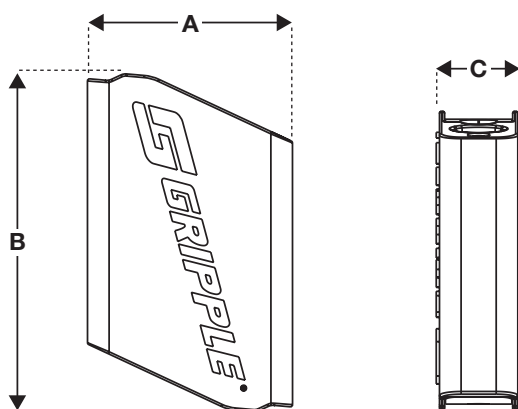

Dimension	No.2 (mm)	No.3 (mm)
A	17.4	19
B	24.2	27.7
C	8	8

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.grippler.com

SUBMITTAL INFORMATION

Safe Working Load:

Ambient Load ratings
No.2 - 45 kg (5:1)
No.3 - 90 kg (5:1)

Material:

Housing - 316L Stainless Steel
Roller - Sintox FA
Spring - Stainless Steel (type 302)
End Cap - PP CP UV Stabilised

PI-SSTEELHANGER-ENG

www.grippler.com

Grippler's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.



Grippler Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ
Tel 0800 018 4264 Fax 0114 275 1155 email info@grippler.com