


## Spike lights specification sheet

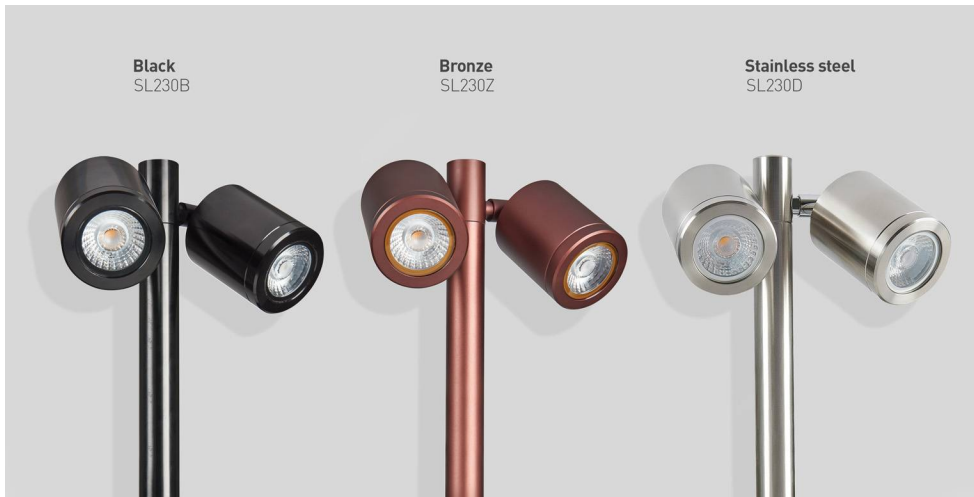

# SL230 Mains

Mains voltage LED twin pole spike light

## Features

|                        |             |
|------------------------|-------------|
| IP Rating              | IP65        |
| CSP Switchable         | Single CCT  |
| Tilttable              | 90°         |
| Rotation Angle         | 330°        |
| LED Lifetime           | L70 70,000h |
| Colour Rendering Index | CRI>80      |
| Colour Consistency     | SDCM3       |

## Installation information

|                           |   |
|---------------------------|---|
| UK Bathroom Zone          | N/A   |
| Inrush Current            | 120A 375s                                       |
| Construction Material     | Anodised aluminium                              |
| Weight                    | SL230B: 1578g<br>SL230D: 3500g<br>SL230Z: 1577g |
| Ambient Temperature Range | 35°C  |
| SELV                      | SELV  |
| Electric Class (1, 2, 3)  | 1   |

## Photometrics @ 25°C

| Product code | Finish                    | W     | Colour | Beam | lm   | lm/W   | lx @ 1m  |
|--------------|---------------------------|-------|--------|------|------|--------|----------|
| SL230ZWBM30  | Bronze anodised aluminium | 11.4W | 3000K  | 40°  | 1040 | 2 x 91 | 2 x 1182 |
| SL230BWBM27  | Black anodised aluminium  | 11.4W | 2700K  | 40°  | 1030 | 2 x 90 | 2 x 1171 |
| SL230BWBM30  | Black anodised aluminium  | 11.4W | 3000K  | 40°  | 1040 | 2 x 91 | 2 x 1182 |
| SL230DWB27   | Stainless steel           | 11.4W | 2700K  | 40°  | 1030 | 2 x 90 | 2 x 1171 |
| SL230DWB30   | Stainless steel           | 11.4W | 3000K  | 40°  | 1040 | 2 x 91 | 2 x 1182 |

## Wiring information

|                         |   |
|-------------------------|---|
| Cable / Flying Lead     | 3m H05RN-F rubberised cable (outside diameter: 7mm) |
| Type of Wiring Required | Parallel  |

## LED driver

|                              |          |     |    |     |     |     |
|------------------------------|----------|-----|----|-----|-----|-----|
| N/A (integrated SELV driver) | 220-240V | Yes | No | N/A | N/A | N/A |
|------------------------------|----------|-----|----|-----|-----|-----|

## Accessories

|       |  |                 |
|-------|--|-----------------|
| JB5   | Gel filled waterproof connector  | Sold Separately |
| GH220 | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |
| GS220 | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

7 years

## Features & benefits

11.4W

Coastal protected

IP65 ideal for outdoor areas

Adjustable pole-mounted twin heads are perfect for illuminating paths, steps and trees

Easily ground mounted with spiked pole and single cable for quick installation

Elegant and discreet black and bronze finishes

Mains voltage for easy installation

Highly efficiency of 93lm/W

Light source  
energy efficiency:



Beam angle: 40°

