


# EUROLAN Copper cable

## C6 U/UTP In/out LSZH+PE

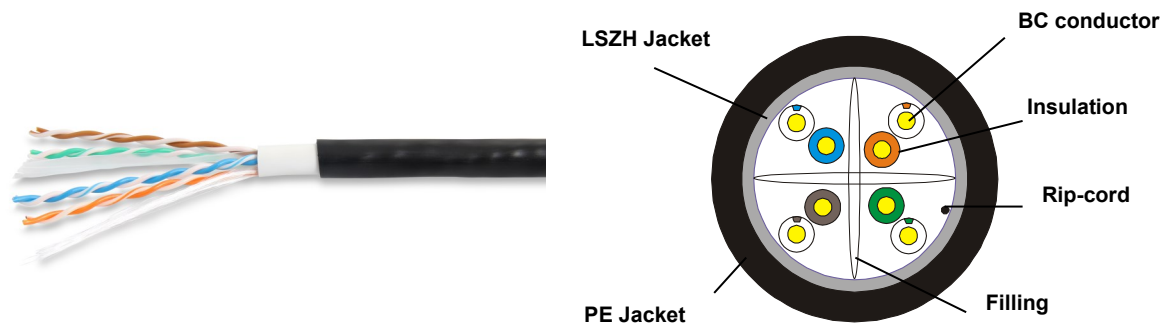

### Ordering information

Part number	E-number	Description
19D-U6-37BL-R500	4903295	Eurolan C6 U/UTP In/Outdoor Fca/Dca double jacket LSZH+PE BL 500m/reel

### Construction

<b>Conductor</b>	Bare copper wire Ø 0,55 mm (AWG23)	
<b>Insulation</b>	High Density Polyethylene, Ø 0,95 ± 0,05 mm	
<b>Inner jacket</b>	LSZH Ø 0,55 White	
<b>Twisting</b>	2 cores to the pair	
<b>Cable lay up</b>	1x4 pairs to the core, non-metallic cross separator (spline), rip-cord	
<b>Sheath outer Ø</b>	Ø 7,3 ± 0,5 mm - LDPE (RoHS compliant) Black	

### Mechanical Properties

<b>Bending radius</b>	Without load	≥ 4 x OD
	With load	≥ 8 x OD
<b>Temperature range</b>	Installation temperature	-30°C to +50°C

- ✓ Verified for high-speed applications up to 250 MHz (1Gbit Ethernet)
- ✓ **Application:**  
Primary (campus), Secondary (riser), Tertiary (horizontal)  
IEEE 802.3:  
10/100/1000/10000 BaseT  
IEEE 802.5 16MB; ISDN;  
FDDI; ATM Power over Ethernet (PoE) PoE+
- ✓ **Standards:**  
ISO/IEC 11801; TIA568-C.2

# EUROLAN Copper cable

## C6 U/UTP In/out LSZH+PE

Electrical Properties		
<b>Sheat Physical Properties</b>	Before aging	Tensile Strenght (Mpa) $\geq 10,0$ Elongation (%) $\geq 350$
	Aging period ( $^{\circ}\text{C}\times\text{hrs}$ )	100 $^{\circ}\text{C}\times 24\text{hx}10\text{d}$
	After aging	Elongation (%) $\geq 300$
	Cold bend	(-20 $\pm$ 2 $^{\circ}\text{C}\times 4\text{h}$ ) no visible cracks
<b>Electrical Characteristics (20<math>^{\circ}\text{C}</math>)</b>	Characteristic impedance	( $\Omega$ ) 100 $\pm$ 15
	Delay skew (ns/100m)	$\leq 45$
	DC resistance ( $\Omega/100\text{m}$ ) max	9,5
	DC conductor Resistance Unbalance (%)	Max 5,0
<b>Nominal velocity propagation (NVP)</b>	69%	

Electrical Data (nominal) acc, to C6 <sub>A</sub> (at 20 $^{\circ}\text{C}$ )							
F	Return loss	Attenuation	NEXT	PHASE	PS-NEXT	ELFEXT	PS-ELFEXT
(MHz)	(dB)	(dB/100m)	(dB)	$\leq \text{ns}$	(dB)	(dB/100m)	(dB/100m)
1,0	20	2,03	74,3	570,00	72,3	67,8	64,8
4,0	23	3,78	65,3	552,00	63,3	55,8	52,8
8,0	24,5	5,32	60,8	546,73	58,8	49,7	46,7
10,0	25	5,95	59,3	545,38	57,3	47,8	44,8
16,0	25	7,55	56,2	543,00	54,2	43,7	40,7
20,0	25	8,47	54,8	542,05	52,8	41,8	38,8
25,0	24,3	9,51	53,3	541,20	51,3	39,8	36,8
31,25	23,6	10,67	51,9	540,44	49,9	37,9	34,9
62,5	21,5	15,38	47,7	538,55	45,4	31,9	28,9
100,0	20,1	19,80	44,3	537,60	42,3	27,8	24,8
200,0	18,0	28,98	39,8	536,54	37,8	21,8	18,8
250,0	17,3	32,85	38,3	536,27	36,3	19,8	16,8