
PRODUCT SPECIFICATION

CONNECT IT

EUROLAN Fiber patchcords

2XSC-SC UPC Singlemode OS2 duplex Grade B

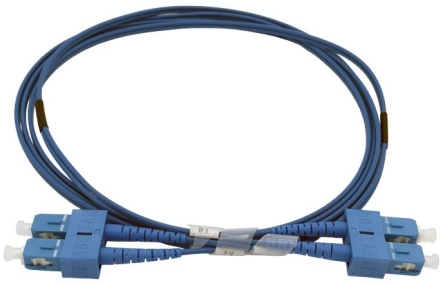

Ordering information		
Part number	E-number	Description
41F-S2-SC-SC-0EU-BU	5066500	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 0,5m
41F-S2-SC-SC-01U-BU	5066501	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 1m
41F-S2-SC-SC-02U-BU	5066502	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 2m
41F-S2-SC-SC-03U-BU	5066503	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 3m
41F-S2-SC-SC-05U-BU	5066504	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 5m
41F-S2-SC-SC-07U-BU	5066505	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 7m
41F-S2-SC-SC-10U-BU	5066506	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 10m
41F-S2-SC-SC-15U-BU	5066507	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 15m
41F-S2-SC-SC-20U-BU	5066508	Eurolan fiber patchcord 2XSC-SC 9/125 UPC 20m

Eurolan Simplex fiber patch is manufactured for use in fiber optic networks with high demands where quality and functionality are crucial factors. The termination method is in accordance with current specifications and the work is carried out under controlled conditions. Each Eurolan fiber cabling is visually inspected and measured for approved results to become an approved product. The products are specially adapted for FTTX installations. Measurement protocols are included with each individual cabling and are packaged in a plastic bag. Included in the Eurolan system warranty.

- Kevlar reinforced
- 2mm outer jacket and LSZH
- Glass G657 A1
- All connectors meet the specifications in Telecordia GR-326-CORE. Grade B, OS2,
- Color coding on cable; 9/125 Blue
- Test protocol come with each item
- It has a maximum attenuation of ≤0.12dB per connector
- Bending radius 30mm

Specification	
Insertion Loss	≤0.12dB
Return Loss	UPC ≥55dB
Repeatability	≤0.1dB
Durability	≤0.2dB typically change 1000 matings
Interchangeability	≤0.1dB
Tensile strength	>15kg
Operating temperature	-40°C to +85°C