

PRODUCT SPECIFICATION


CONNECT

IT

EUROLAN Copper patchcable C6 U/UTP Outdoor

Ordering information

Part number	E-number	Description
21E-U6-0EBL	5152385	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 0,5 BLACK
21E-U6-01BL	5152381	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 1M BLACK
21E-U6-02BL	5152382	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 2M BLACK
21E-U6-03BL	5152383	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 3M BLACK
21E-U6-05BL	5152384	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 5M BLACK
21E-U6-07EBL	5152390	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 7,5M BLACK
21E-U6-10BL	5152386	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 10M BLACK
21E-U6-15BL	5152387	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 15M BLACK
21E-U6-20BL	5152388	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 20M BLACK
21E-U6-30BL	5152389	EUROLAN PATCH RJ45-RJ45 C6 U/UTP 30M BLACK

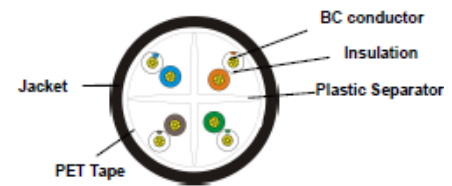

Cabling for outdoor use, or where the environment requires temperature and/or chemical resistance. Black PE sheathed cable with heat shrink tubing and molded bend protection and supplied individually packed. Verified up to 250MHz.

Technical data

Cable type	U/UTP
Category	6
Type of connector 1	RJ45 8(8)
Type of connector 2	RJ45 8(8)
Anti-kink sleeve	Moulded-on
Locking lever	Yes
Fire retardant version	No
Halogenfree (IEC 60754-1, 2)	Yes
Cable construction	4x2
AWG size	24
Pin assignment	1:1
NVP value	68

- Halogen-free
- Characterised up to 250MHz
- AWG 24
- Follows the RoHS directives
- Molded connectors
- Delivered piecepacked in pin-pack
- Standards:
ISO/IEC 11801:2002
ANSI/TIA-568-C.2:2009