



# DESIGNLIGHT

SCANDINAVIAN AB

## LINJÄR HIGH BAY 100W

E-NR: 72 177 00


ART NR: LHB-100

| EFFECT POWER | MATERIAL MATERIAL | KELVIN KELVIN | ARMATURFÄRG ARMATURE COLOR | ANSLUTNING CONNECTION | TOTAL LUMEN | USEFUL LUMEN |
|--------------|-------------------|---------------|----------------------------|-----------------------|-------------|--------------|
| 100W         | ALUMINIUM         | 4000K         | SVART/BLACK                | 230V                  | 15070LM     | 18202LM      |


CE, RoHS 




 **LIFETIME**  
L80B50: 179000H

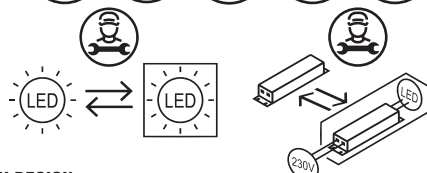

- MINIMALISTISK DESIGN
- GJUTET ALUMINIUMHUS MED AKZO NOBEL PULVERLACK
- ÖVERLÄGSEN LJUSKONTROLL, MINIMERA LJUSFÖRENINGAR

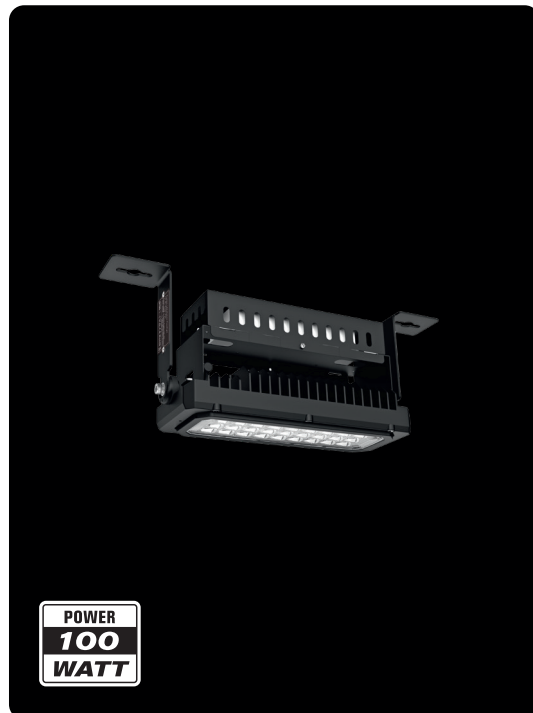


POWER  
**100**  
WATT

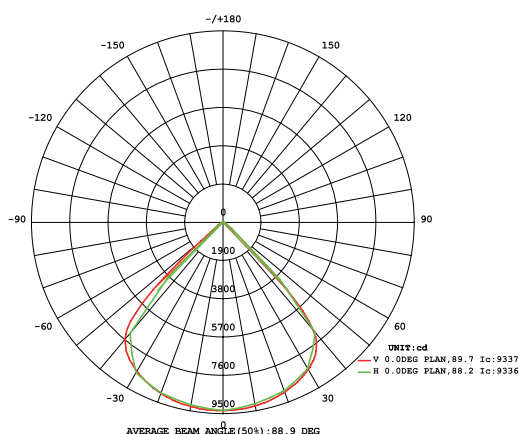

## ANTAL ARMATURER PER SÄKRING

| B10 | B16 | C10 | C16 | D10 | D16 |
|-----|-----|-----|-----|-----|-----|
| 5   | 8   | 8   | 14  | 17  | 27  |

### Mått/Dimension

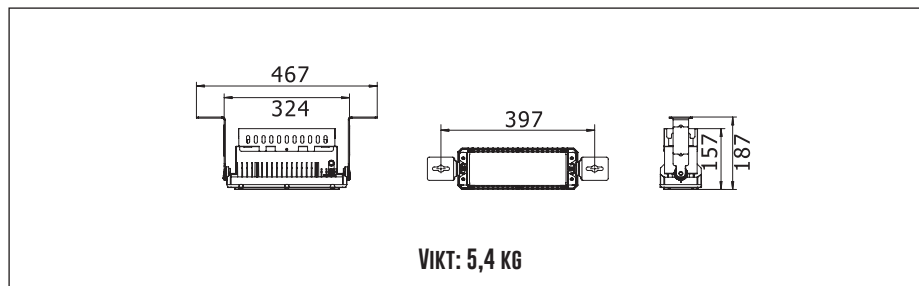

|                       |                       |                               |                       |                            |                       |                        |
|-----------------------|-----------------------|-------------------------------|-----------------------|----------------------------|-----------------------|------------------------|
| 1.900K                | 2.700-3.000K          | 4.000-4.500K                  | 4.800K                | 5.000-5.000K               | 7.000-7.500K          | 10.000K                |
| STEARINLJUS<br>CANDLE | VARMVIT<br>WARM WHITE | NATURLIG VIT<br>NATURAL WHITE | SOLLJUS<br>DIRECT SUN | VITT DAGSLJUS<br>DAY WHITE | KALLVIT<br>COOL WHITE | BLÅ HIMMEL<br>BLUE SKY |

LÄS MER OM VÅRA GARANTIVILLKOR PÅ [WWW.DESIGNLIGHT.NU](http://WWW.DESIGNLIGHT.NU)

**DESIGNLIGHT**  
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · TOFFELVÄGEN 1 · 342 60 MOHEDA

KUNDCENTER: TELEFON 0472-716 10 · FAX 0472-716 09 · [INFO@DESIGNLIGHT.NU](mailto:INFO@DESIGNLIGHT.NU) · [WWW.DESIGNLIGHT.NU](http://WWW.DESIGNLIGHT.NU)

PRODUKTEN INNEHÅLLER LJUSKÄLLA  
MED ENERGIMÄRKNING KLASS B.

### SÄKERHET:

- 1 Installation och underhåll ska utföras av behörig installatör.
- 2 Den externa kabeln/sladden på denna armatur kan inte bytas ut. Om sladden är skadad måste armaturen kasseras.
- 3 Jord ska vara väl ansluten.
- 4 Se till att armaturen är kopplad med rätt märkspänning.
- 5 Använd inte kemiska eller frätande medel för att rengöra armaturen.
- 6 Minsta avstånd mellan armatur och upplyst objekt ska vara minst 0,3 meter.



### SAFETY:

- 1 Installation and maintenance must be performed by qualified person.
- 2 The external flexible cable or cord of the luminaire cannot be replaced. If the cord is damaged, the luminaire shall be destroyed.
- 3 Ground wire must be well connected.
- 4 Please make sure the lamp is working with correct input voltage.
- 5 Do not use chemicals or corrosive cleaner to clean the fixture.
- 6 The minimum distance from lighted objects to luminaires shall be kept at least 0.3 m.

