




ER 14.2 1200 5/8" ST CU (614 120)

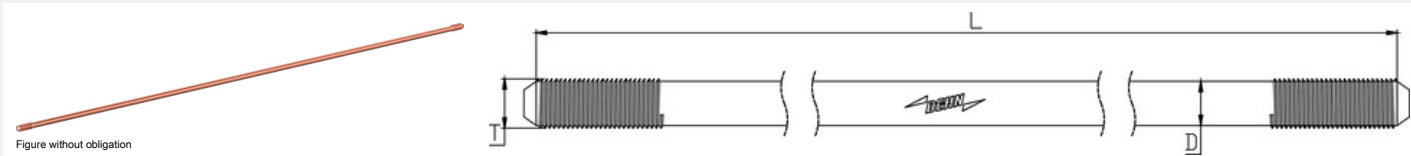

Copper bonded earth rods offer an economical earth electrode solution for achieving low earth resistance. Manufactured by molecularly bonding 99.9% pure electrolytic copper of minimum thickness 250 microns on to a low carbon high tensile strength steel core.

Type	ER 14.2 1200 5/8" ST CU
Part No.	614 120 ✓
Material	Copper/Steel
Rod Length (L)	1200 mm
Nominal diameter (T)	5/8" : 15.87 mm
Thread Size	UNC-2A
Rod Diameter (D)	14.2 mm
Cu layer	250 microns / 0.25 mm
Standards	IEC / EN IEC / BS EN IEC 62561-2
Weight	1,53 kg
Customs tariff number (Comb. Nomenclature VAE)	85389099
GTIN	4013364241435
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.