DATASHEET

SELENE MINI
3000K-4000K

79-0110-000210P E-nr. 7750323



SELENE MINI is a park fixture in a timeless design. Can be chosen with different optics: diffused or asymmetrical, to meet many needs and areas of application.

PHOTOMETRIC DATA

Lumen output 3000K:	**1068 / 3008lm**
Luminaire effeciency 3000K:	**106,8 / 100lm/W**
Lumen output 4000K:	**1150 / 3090lm**
Luminaire effeciency 4000K:	**106,8 / 103lm/W**
Colour temperature:	**3000-4000K**
Colour rendering:	**CRI 75**
SDCM (MacAdam):	**3**
Lifespan:	**L90B10 100.000 hours (25°)**
Light distribution:	**Symmetrical**

LIGHT CONTROL


Dimable:	**Yes**
Dimming method:	**8h 50%**


ELEKTRICAL DATA

Voltage:	**220-240VAC**
Frequency:	**50/60Hz**
Power:	**10-30W**
Power faktor:	**>0,9**
Leakage current:	**0,7mA**
Driver:	**Intern**

MECHANICAL DATA

Dimensions:	**Ø:412 x H:545**
Weight:	**6,1kg**
Material:	**Diecast aluminium**
Shielding:	**UV-resistant polycarbonate**
Ambient temperature:	**-35°C – +50°C**
Fixture colour:	**Grey (RAL9007)**
IP rating:	**IP66**
IK Class:	**IK10**
Insulation class:	**II**
Transient protection:	**10kV**
Installation height:	**3-5 meters**
Montage type:	**Top**
Connection:	**5m (2x1mm)**
Cable type:	**PKL**

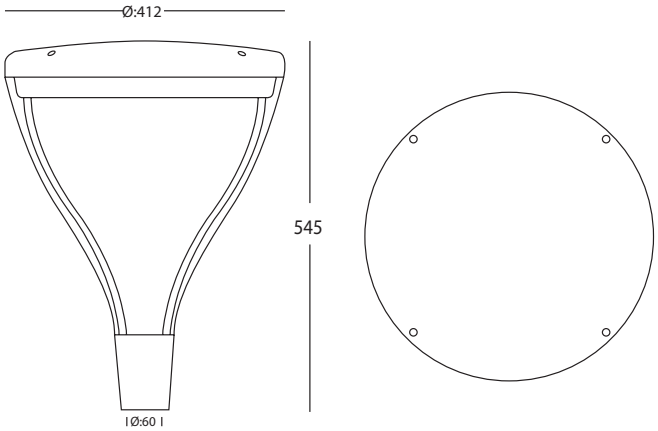

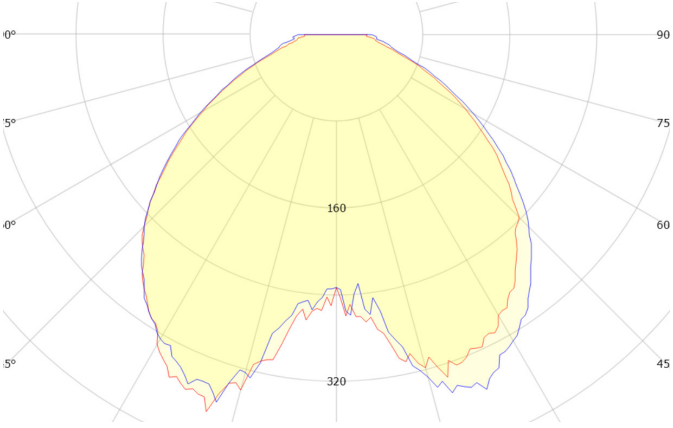

Updated 20.05.2026

www.lite-led.dk