

PHOTOMETRIC DATA

Lumen output 3000K:	3125lm
Luminaire efficiency 3000K:	104lm/W
Colour temperature:	3000K
Colour rendering:	CRI 80
SDCM (MacAdam):	3
Lifespan:	L90B10 100.000 hours (25°)
Light distribution:	Symmetrical

LIGHT CONTROL

Dimable:	Yes
Dimming method:	8h 50%

ELEKTRICAL DATA

Voltage:	220-230VAC
Frequency:	50/60Hz
Power:	30W
Power faktor:	>0,9
Leakage current:	0,7mA
Driver:	DALI

MECHANICAL DATA


Dimensions:	Ø:180 x H:145
Weight:	3,4kg
Material:	Diecast aluminium
Shielding:	Thermoglass
Ambient temperature:	-35°C – +50°C
Fixture colour:	Grey (RAL9007)
IP rating:	IP66
IK Class:	IK8
Insulation class:	II
Transient protection:	10kV
Installation height:	3-7 meters
Montage type:	Flexible and direct brackets
Connection:	5m (2x1mm)
Cable type:	PKL

77-0110-000002P

E-nr. 7750337



VISTA is a floodlight designed to create effect lighting in city and urban areas. It offers flexibility in installation, as you can mount several lamps on one mast. Vista is offered with different lenses to meet the demands of different applications.

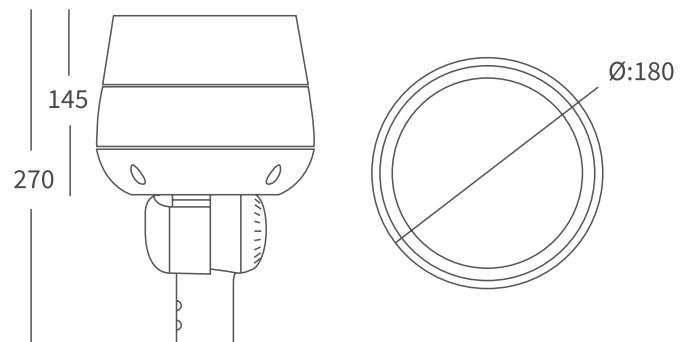

VISTA 25°

