VIZULO

BLACKBIRD MINI Facade mount Eco
BBSJE 030 730 Z22 BR010 NSF NDG2



Artikelnummer: 7707164
Vizulo artikelnr: 82200106

CE RoHS

Color [redacted]68/80347

Electrical	**Input power**	30 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.98
	Inrush current	24.88 A / 236 µs
	Stand-by power	0.16 W
Optical	**Optic name**	Z22
	Distribution type	TYPE-III
	Longitudinal classification	M
	Luminous flux	3712 lm ±7%
	Luminous efficacy	124 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	LED quantity	10
Lifetime	**Lumen depreciation**	L90 after 100 000 h
	Driver failure rate	<10% in 100 000 h
	Warranty	10 years
	Ambient temperature range	-40 ... +50 °C
Protection	**Protection class**	Class II
	Surge protection L-N	6 kV

	Surge protection L/N-PE	10 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	20
	Max products per MCB C16	32
	Ingress protection	IP66
	Impact resistance	IK09

Housing

	Body material	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	68/80347 (mica 3602 mf/ma)
	Dimensions	313 x 200 x 192 mm
	Mounting	Facade mount
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	With tools


Controls

	Dimming	DALI
	Dimming range	5 - 100%


Approvals

	CE	Yes
	RoHS	Yes

Light distribution

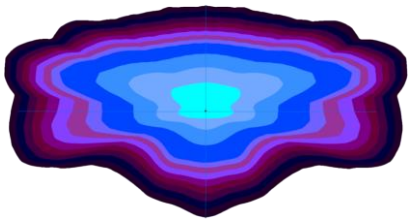

Dimensions

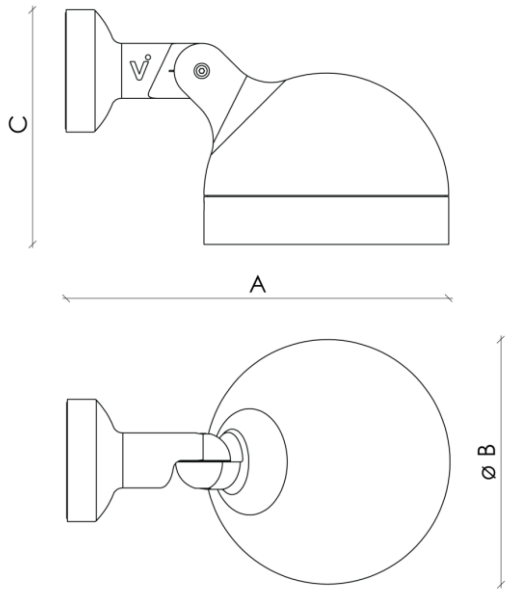

Product images

