ROBIN Wall Eco

RBE 010 730 E22 BC008 CB NC2



Artikelnummer: 7707166

Vizulo artikelnr: 4113100093

CE RoHS

Color [redacted] RAL 9005

Electrical	**Input power**	10 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.86
Optical	**Optic name**	E22
	Distribution type	TYPE-II
	Longitudinal classification	M
	Luminous flux	1363 lm ±7%
	Luminous efficacy	136 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	8
Lifetime	**Lumen depreciation**	L90 after 100 000 h
	Warranty	5 years
	Ambient temperature range	-40 ... +50 °C
Protection	**Protection class**	Class II

	Surge protection L-N	kV
	Surge protection L/N-PE	kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	30
	Max products per MCB C16	50
	Ingress protection	IP66
	Impact resistance	IK10

Housing

	Body material	Die-cast aluminium
	Optic material	PC
	Color	RAL 9005 (jet black)
	Dimensions	150 x 120 x 80 mm
	Max wind load area SCd	0.01 m²
	Mounting	Wall
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	With tools


Controls

	Dimming	No dimming


Approvals

	CE	Yes
	RoHS	Yes

Light distribution



Dimensions

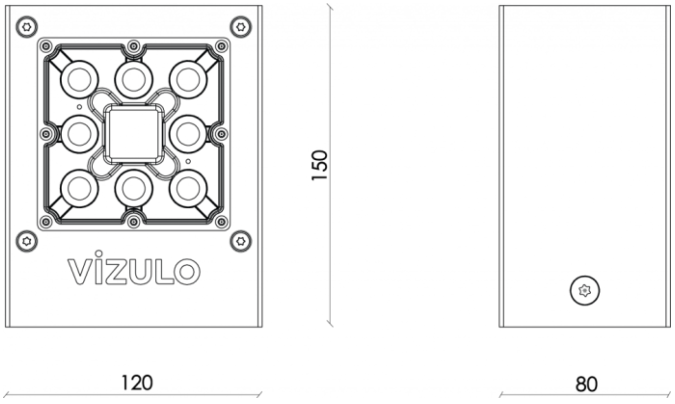

Product images




vizulo