
VIZULO

ROOK

RK 025 730 W22 BD012 CB NG2

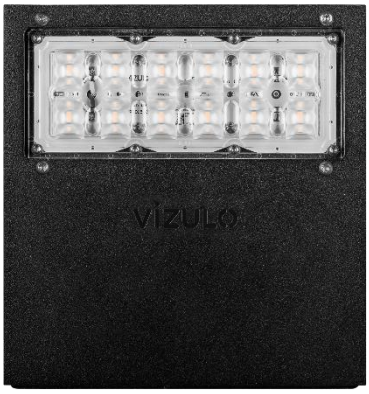

Artikelnummer: 7707167

Vizulo artikelnr: 85100032

CE RoHS

Color [redacted] RAL 9005

Electrical	**Input power**	25 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.97
	Inrush current	25 A / 195 µs
	Stand-by power	0.5 W
Optical	**Optic name**	W22
	Distribution type	TYPE-III
	Longitudinal classification	M
	Luminous flux	3706 lm ±7%
	Luminous efficacy	148 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	12
Lifetime	**Lumen depreciation**	L98 after 100 000 h
	Warranty	5 years
	Ambient temperature range	-40 ... +50 °C
Protection	**Protection class**	Class II


	Surge protection L-N	6 kV
	Surge protection L/N-PE	8 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	21
	Max products per MCB C16	33
	Ingress protection	IP65
	Impact resistance	IK08

Housing	**Body material**	Extruded aluminium
	Optic material	PC
	Color	RAL 9005 (jet black)
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	With tools


Controls	**Dimming**	No dimming

Approvals	**CE**	Yes
	RoHS	Yes

Light distribution

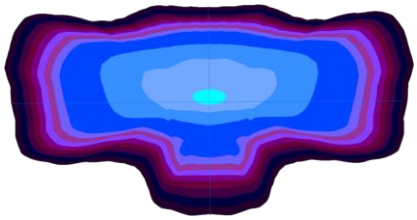

Dimensions

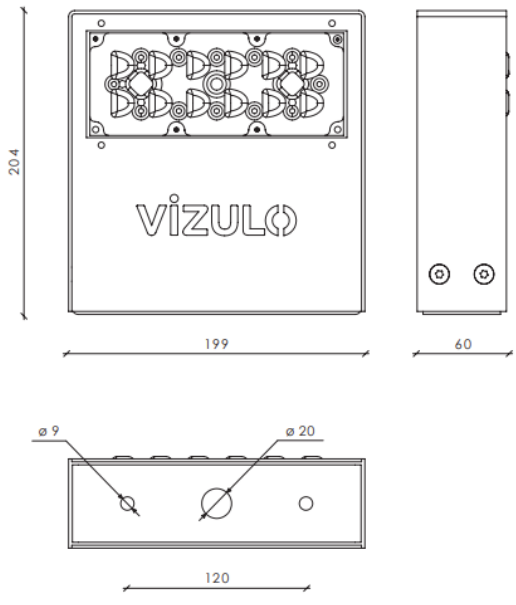

Product images

