


MINI MARTIN Smooth Tool-less Eco
MRSSTE 060 730 L35 AA024 CJN AG1

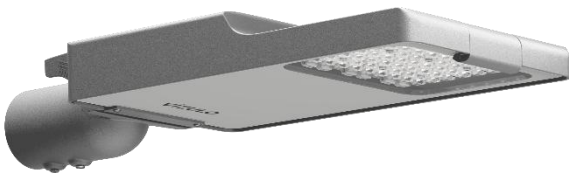

Artikelnummer: 7728826
Vizulo artikelnr: 55109075

CE RoHS

Color  RAL 7035

Power	DIP switch	Steg 1 - 35W/ 4224lm (Original) Steg 2 - 45W/ 5747lm Steg 3 - 60W/ 7621lm
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.97
Optical	Optic name	L35
	Distribution type	TYPE-IV
	Longitudinal classification	M
	Luminous flux	7535 lm ±10%
	Luminous efficacy	126 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	24
Lifetime	Lumen depreciation	L90 after 100 000 h
	Warranty	8 years
	Ambient temperature range	-40 ... +50 °C
Protection	Protection class	Class I
	Surge protection L-N	6 kV

Surge protection L/N-PE	10 kV
LED module thermal protection w/ NTC	No
Ingress protection	IP66
Impact resistance	IK08
Increased corrosion resistance	Primer

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 7035 (light grey)
Dimensions	561 x 220 x 94 mm
Max wind load area SCd	0.04 m ²
Mounting	Post top / side-entry, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	Tool-less


Controls

Dimming	1-10 V
Dimming range	19 - 100%


Approvals

CE	Yes
RoHS	Yes

Light distribution



Dimensions



Product images

