


MINI MARTIN Smooth Tool-less Eco
MRSSTE 060 730 L04 AA024 CJNI AG1

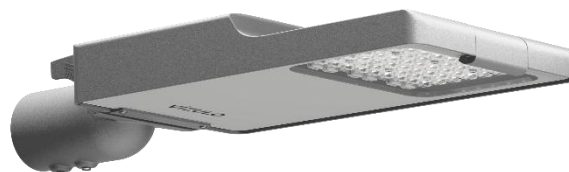

Artikelnummer: 7728828
Vizulo artikelnr: 55109126

CE RoHS

Color  RAL 7035

Power	DIP switch	Step 1 - 35W/ 4542lm (Original) Step 2 - 45W/ 6179lm Step 3 - 60W/ 8195lm
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.97
Optical	Optic name	L04
	Distribution type	TYPE-II
	Longitudinal classification	M
	Luminous flux	8102 lm $\pm 10\%$
	Luminous efficacy	135 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
Lifetime	LED quantity	24
	Lumen depreciation	L90 after 100 000 h
	Warranty	8 years
Protection	Ambient temperature range	-40 ... +50 °C
	Protection class	Class I
	Surge protection L-N	6 kV

Surge protection L/N-PE	10 kV
LED module thermal protection w/ NTC	No
Ingress protection	IP66
Impact resistance	IK08
Increased corrosion resistance	Primer

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 7035 (light grey)
Dimensions	561 x 220 x 94 mm
Max wind load area SCd	0.04 m ²
Mounting	Post top / side-entry, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	Tool-less


Controls

Dimming	1-10 V
Dimming range	19 - 100%


Approvals

CE	Yes
RoHS	Yes

Light distribution



Dimensions



Product images

