VIZULO

BLACKBIRD Post-top Eco
BBPE 040 730 BC5 BT016 CB NNG2



Artikelnummer: 7729633
Vizulo artikelnr: 82124312

CE RoHS

Color [redacted]RAL 9005

Electrical	**Input power**	40 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.96
	Inrush current	17.4 A / 244 µs
Optical	**Optic name**	BC5
	Distribution type	TYPE-III
	Longitudinal classification	M
	Luminous flux	5525 lm ±7%
	Luminous efficacy	138 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	3000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	16
Lifetime	**Lumen depreciation**	L90 after 100 000 h
	Warranty	8 years
	Ambient temperature range	-40 ... +50 °C
Protection	**Protection class**	Class II


	Surge protection L-N	6 kV
	Surge protection L/N-PE	10 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	26
	Max products per MCB C16	43
	Ingress protection	IP66
	Impact resistance	IK10

Housing	**Body material**	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	RAL 9005 (jet black)
	Dimensions	447 x 380 x 340 mm
	Max wind load area SCd	0.10 m²
	Mounting	Post-top (60 mm)
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	With tools


Controls	**Dimming**	No dimming

Approvals	**CE**	Yes
	RoHS	Yes

Light distribution



Dimensions

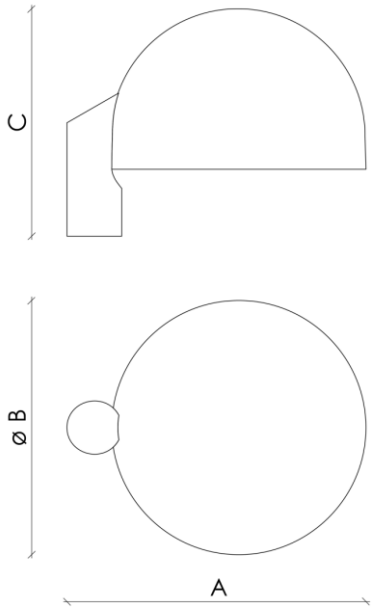

Product images

