URBAN

Blackbird family

IP66 [1] IK10 RoHS EPD

RAL7035 RAL9006 DB703 RAL9005 Other colors on request

Body:	Die-cast aluminium
Power:	5 - 100 W
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI:	>70 / >80 / >90 [2]
CCT:	2700 / 3000 / 4000 K [2]
Temperature:	-40 up to +50 °C
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty:	5 years
Installation:	Tool-less / Pre-wired cable 30 cm
Socket:	NEMA Top / Zhaga Top and Bottom
Intelligent control:	Stand-alone / Group / CMS
Sensor:	Motion / Motion + Daylight / Daylight
Surge protection:	4 / 6 / 10 kV
Corrosion protection:	Up to C5
Neto weight:	Up to 10.1 kg

[1] Except Blackbird Mushroom screw version, which has IP65
[2] 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! *Only fixtures with CCT of 3000 K or lower are DarkSky approved!*


screw version


tool-less version


with HALO





Blackbird Mini Top Entry Tool-less
162
ø 200


Blackbird Mini Hanging Tool-less
255
290
ø 200


Blackbird Mini Facade mount
192
313
ø 200



Blackbird Mini Post-top Tool-less
256
300
ø 200

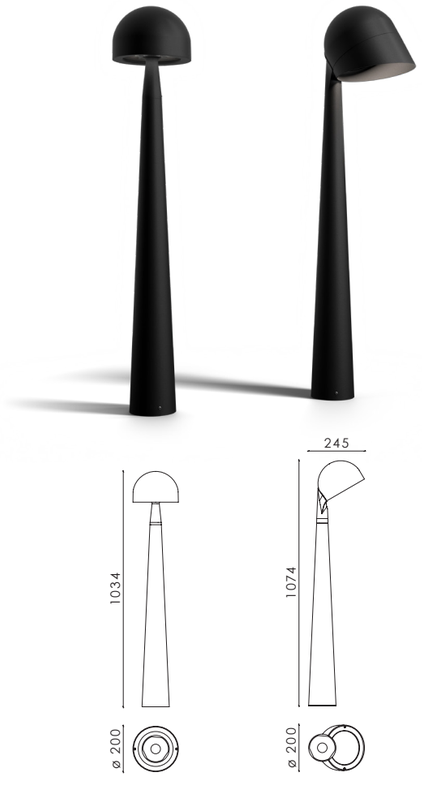



BLACKBIRD SIDE ENTRY (SCREW / TOOL-LESS VERSION)


Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm





BLACKBIRD POST TOP (SCREW / TOOL-LESS VERSION)


Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm





BLACKBIRD HANGING (SCREW / TOOL-LESS VERSION)


Lumen output: Up to 16 220 lm
Mounting: On wire ø 5 - 12 mm





BLACKBIRD TOP ENTRY (SCREW / TOOL-LESS VERSION)


Lumen output: Up to 16 220 lm
Mounting: On console with G3/4 | G1/2 | M32 thread





BLACKBIRD SCEPTER (SCREW / TOOL-LESS VERSION)


Lumen output: Up to 16 220 lm
Mounting: On scepter M20





BLACKBIRD MUSHROOM (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 14 700 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm





BLACKBIRD FLOOD (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: On bracket / wall / ceiling

