

# PRODUCT SPECIFICATION

CONNECT

IT

## EUROLAN Microduct Accessories Divisible miniduct seals

### Ordering information 5MM

Part number	E-number	Description
823555.1	5045552	Divisible miniduct seal 5MM/0,9MM purple
823555.2	5045553	Divisible miniduct seal 5MM/1,25MM red
823555.9	5045898	Divisible miniduct seal 5MM/end seal black



Miniduct seal

### Ordering information 7MM

Part number	E-number	Description
823557.1	5045554	Divisible miniduct seal 7MM/0,9MM purple
823557.2	5045555	Divisible miniduct seal 7MM/1,25MM red
823557.3	5045900	Divisible miniduct seal 7MM/1,6MM green
823557.35	5045901	Divisible miniduct seal 7MM/2,1MM blue
823557.9	5045899	Divisible miniduct seal 7MM/end seal black



Miniduct end seal

# PRODUCT SPECIFICATION

CONNECT

IT


## EUROLAN Microduct Accessories Divisible miniduct seals

For easy gas- and watertight sealing of cables in miniducts. The miniduct seal is easy to mount on new- and existing installations. Thanks to the clever design, shifting the seal over the fiber now belongs to the past. Due to the compact design this seal can be installed in every situation, even in locations with difficult access.

### Features

- Gas and Watertight up to 0,5 bar
- Suitable for retro fitting
- Easy installation
- No need to slide the seal over the glass fiber for installation
- Slim design

### Specifications (5MM/7MM)



Properties	Value
Dimensions	21x10 mm
Plastic housing	PC based
Sealing plug	TPE
Sealing	Up to 0,5 bar

### Pull strenght duct seal from the duct


Duct size		
OD	5MM Seal	7MM Seal
5 MM	≥50N	
7 MM		≥70N

Values are indications, true values may depend on cables, duct and field installations.

The measure-speed is 100mm/min.

Temperature 20°C.

# PRODUCT SPECIFICATION

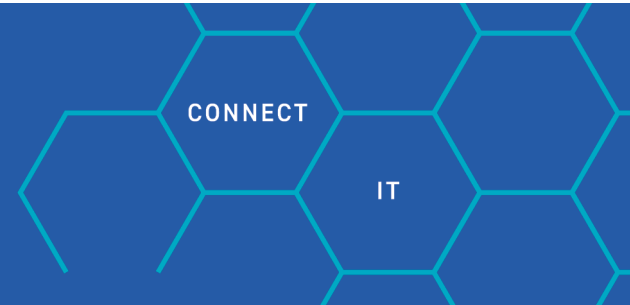


## EUROLAN Microduct Accessories Miniduct end seals

For easy gas- and watertight sealing of cables in miniducts. The miniduct seal is easy to install. Due to the compact design this seal can be installed in every situation, even in locations with difficult access.

### Features

- Gas and Watertight up to 10,0 bar
- Suitable for retro fitting
- Easy installation
- Slim design

### Specifications (5MM/7MM)



Properties	Value
Dimensions	21x10 mm
Plastic housing	PC
Sealing plug	TPE
Sealing	Up to 10,0 bar

### Pull strenght duct seal from the duct

Duct size		
OD	5MM Seal	7MM Seal
5 MM	>20N	
7 MM		>20N

Values are indications, true values may depend on cables, duct and field installations.

The measure-speed is 100mm/min.

Temperature 20°C.