


# Fluorescent lamp Bonalux®

NL-T5 14W/830/G5

# Radium

Product Datasheet Date: 30.09.2021

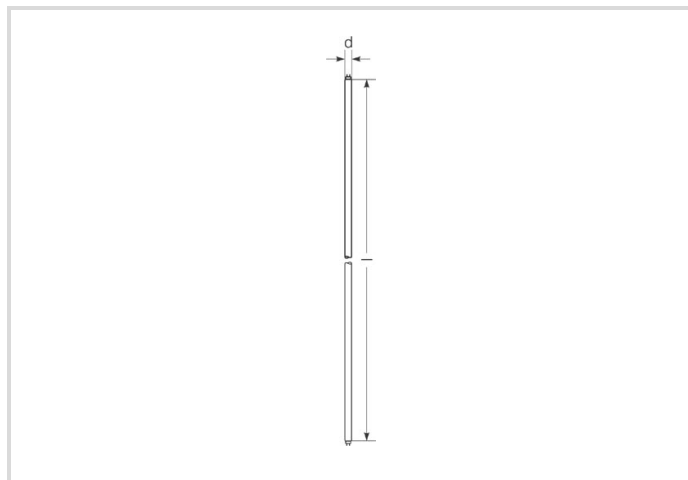

A+



G



1200



3000K




24 000h



Dimmable

## General Data

|                           |   |
|---------------------------|---|
| Article No.               | 31114241  |
| Code                      | NL-T5 14W/830/G5  |
| Product EAN               | 4008597142413   |
| Customs tariff no.        | 85393110  |
| Box quantity (pcs.)       | 20  |
| EAN Box                   | 4008597442414   |
| Gross weight of box in kg | 1.489   |
| Length of box in m        | 0.587   |
| Width of box in m         | 0.104   |
| Height of box in m        | 0.09  |
| ETIM class                | EC000108  |
| ETIM class name           | Fluorescent lamp  |
| Product status            |  Phase Out |

## Electric Parameters

|  |        |
|--|--------|
| Lamp nominal wattage                       | 14 W   |
| Rated wattage                              | 14.0 W |
| Weighted energy consumption in 1,000 hours | 16 kWh |

## Electric Parameters

|                      |        |
|----------------------|--------|
| Mains voltage        | 230 V  |
| Nominal current (mA) | 165 mA |
| dimnable             | Yes    |

## Light Application Parameters

|                             |            |
|-----------------------------|------------|
| Luminous flux               | 1200 lm    |
| max. luminous flux          | 1350 lm    |
| max. luminous flux at       | 35 °C      |
| Luminous efficiency         | 96.43 lm/W |
| Luminous efficiency of lamp | 96.43 lm/W |
| Radium light colour         | warm white |
| Colour temperature          | 3000 K     |
| Colour rendering index Ra   | 80-89      |
| Mean luminance              | 1.7        |
| Lumen maintenance at 2000h  | 0.95       |
| Lumen maintenance at 4000h  | 0.93       |
| Lumen maintenance at 6000h  | 0.92       |
| Lumen maintenance at 8000h  | 0.90       |
| Lumen maintenance at 12000h | 0.90       |
| Lumen maintenance at 16000h | 0.90       |
| Lumen maintenance at 20000h | 0.89       |

## Service Life

|                                |         |
|--------------------------------|---------|
| Average nominal lifespan       | 24000 h |
| Lamp survival factor at 2000h  | 0.99    |
| Lamp survival factor at 4000h  | 0.99    |
| Lamp survival factor at 6000h  | 0.99    |
| Lamp survival factor at 8000h  | 0.99    |
| Lamp survival factor at 12000h | 0.99    |
| Lamp survival factor at 16000h | 0.90    |
| Lamp survival factor at 20000h | 0.50    |

## Specification

|                      |       |
|----------------------|-------|
| Energy Label A to G  | G     |
| Energylabel A++ to E | A+    |
| Diameter max.        | 16 mm |

## Specification

|                 |        |
|-----------------|--------|
| Length max.     | 549 mm |
| Length          | 549 mm |
| Mercury content | 1.5 mg |
| Lamp shape      | Rod    |
| Base            | G5     |
| Colour          | Other  |

## Miscellaneous

|              |     |
|--------------|-----|
| EU Directive | TIM |
|--------------|-----|

## Notes

Fluorescent lamp HE T5-16mm diameter, light colour 830, high luminous efficiency, good colour rendering, long life, base G5. Controllable by Dim-ECG.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Base




G5  
IEC/EN 60061-1  
sheet 7004-52-5

### Spectrum


Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

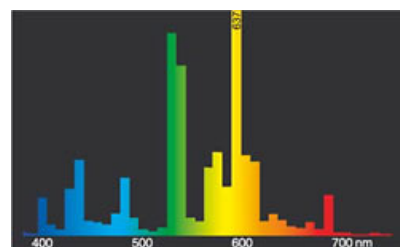

light colour 830 Spectralux® Warm white (31)

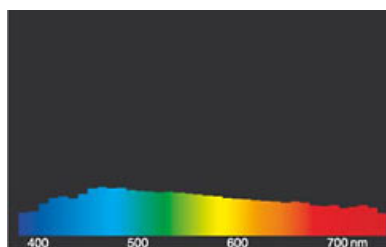

daylight(D 65)

### Special features



### General notes

# Fluorescent lamp Bonalux®

NL-T5 14W/830/G5

# Radium

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.