

**Order No.:** 5XE6D33A08JB000001 | E7728815


**Product description:** SL21mn,ST1.0a,10302lm730,Easy



Streetlight SL 21 mini, mast luminaire, primary light control with lens, of PMMA, primary optical cover: cover, of toughened safety glass, transparent, light distribution: ST1.0a, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, side-entry, LED, High Power LED, rated luminous flux: 10.302 lm, luminous efficacy: 153lm/W, light colour: 730, colour temperature: 3000K, control gear: ECG dimmable, control: flexible luminous flux parameterisation, time-dependent luminous flux control, constant luminous flux control, overheat protection, mains connection: 220..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 12,5m, start of lifetime: 67W, end of lifetime: 69,3W, reduction: 32,2W, luminaire housing, of diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), length:628mm, width: 235mm, height: 110mm, mast flange for spigot size 60mm (post-top / side-entry) included, protection rating (complete): IP66, insulation class (complete): insulation classII (safety insulation), certification: CE, ENEC, VDE, impact resistance: IK09, permissible operating ambient temperature for outdoor applications: - 40..+50°C, standard-compliant lighting for roads and squares, packaging unit:1 piece



Lamps: LED  
Wt. (kg): 5.4

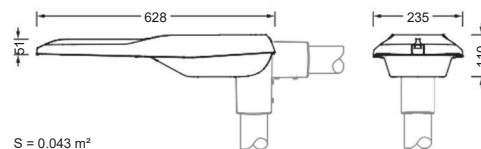

**Order No.:** 5XE6D33A08JB000001 | E7728815

**Detailed technical description:** SL21mn,ST1.0a,10302lm730,Easy



## Key data

- Product type: mast luminaire
- Product name: Streetlight SL 21 mini
- Order No.: 5XE6D33A08JB000001

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: ST1.0a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 10302lm
- Luminous efficacy: 153lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 70
- Light colour: 730
- Rated input power begin service life: 67
- Rated input power end service life: 69,3
- Rated input power at 50% lumin. flux: 32,2

#### Operating device:

- Control gear: ECG dimmable
- Control: Easy
- Equipment: overheat protection, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation
- 50% power reduction 3 hours before / 5 hours after virtual midnight

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK09
- Temperature range (operation): -40..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Corrosion protection: corrosivity category C5 according to DIN EN ISO 12944
- Certification, designation: CE, ENEC, VDE

## Material, Colour

- luminaire housing: diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), please order mast flange separately, inclination adjustable: 0°, 5°, 10°, 15°, sealing non-destructively replaceable, multi-level sealing system
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: cover of toughened safety glass

## Mounting

- Mounting method, mounting location: side-entry, post-top, on mast
- Mast flange Ø60mm included

## Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: 10kV 1.2/50µs
- Connection cable: pre-assembled, L=12.5m

## Dimensions, Weight

- Length: 628mm
- Width: 235mm
- Height: 110mm
- Weight: 5.4kg
- Mast spigot: mast flange for spigot size 60mm (post-top / side-entry) included

## Light emission


- Light emission: 0% at 0° inclination

## Service life

- Rated service life: 100000h (L97/B10) at AT = 25°C

**Order No.:** 5XE6D33A08JB000001 | E7728815

**Dimensions:** SL21mn,ST1.0a,10302lm730,Easy

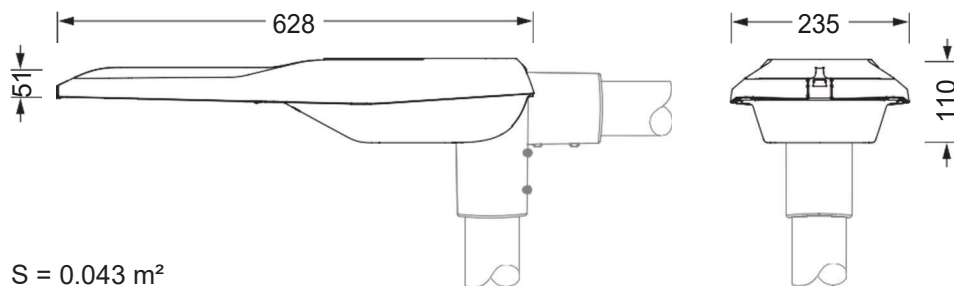

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 07.02.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -